

System Specification	VersaLink C405N VersaLink C405DN		
One-Sided Speed			
8.5 x 11 in.	Up to 36 ppm colour and black-and-white		
A4 / 210 x 297 mm	Up to 35 ppm colour and black-and-white		
8.5 x 14 in. / 216 x 356 mm	Up to 30 ppm colour and black-and-white		
Two-Sided Speed			
8.5 x 11 in.	Up to 24 ppm colour and black-and-white		
A4 / 210 x 297 mm	Up to 23 ppm colour and black-and-white		
8.5 x 14 in. / 216 x 356 mm	Up to 21 ppm colour and black-and-white		
Monthly Duty Cycle ¹	Up to 80,000 pages / month		
Recommended Average Monthly Print Volume ²	Up to 5,000 pages		
Processor	1.05 GHz Dual-Core		
Memory	2 GB		
Connectivity	Ethernet 10/100/1000 Base-T High-speed USB 3.0 Wi-Fi 802.11n and Wi-Fi Direct with optional Wi-Fi Kit NFC Tap-to-Pair		
Controller Features	Unified Address Book, Configuration Cloning, Scan Preview, Xerox Extensible Interface Platform®, Xerox® App Gallery, Xerox® Standard Accounting, Role Based Permissions, Convenience Authentication Enabled, Online Support (accessed from the user interface and print driver)		
Paper Handling	VersaLink C405N VersaLink C405DN		
Document Feeder			
Capacity ³	Single-Pass Duplex Automatic Document Feeder (DADF): 50 sheets		
Sizes	Custom Sizes: 5.5 x 5.5 in. to 8.5 x 14 in. / 139.7 x 139.7 mm to 216 x 356 mm		
Weights	16 lb. bond to 45 lb. cover / 60 – 125 gsm		
Bypass Tray			
Capacity ³	150 sheets		
Sizes	Custom Sizes: 3 x 5 in. to 8.5 x 14 in. / 76.2 x 127 mm to 216 x 356 mm		
Weights	16 lb. bond to 80 lb. cover / 60 – 220 gsm		

	-403 Colour Multiruriction i mitter		
Bypass Tray			
Media Types	Plain Lightweight Cardstock Cardstock Hole Punched Recycled Pre-Printed Letterhead Bond Lightweight Glossy Cardstock Glossy Cardstock Labels Envelopes Custom		
Tray 1			
Capacity ³	550 sheets		
Sizes	Custom Sizes: 5.8 x 8.3 in. to 8.5 x 14 in. / 148 x 210 mm to 216 x 356 mm		
Weights			
Media Types	Plain Lightweight Cardstock Cardstock Hole Punched Recycled Pre-Printed Letterhead Bond Lightweight Glossy Cardstock Glossy Cardstock Custom		
Optional Tray 2			
Capacity ³	550 sheets		
Sizes	Custom Sizes: 5.8 x 8.3 in. to 8.5 x 14 in. / 148 x 210 mm to 216 x 356 mm		
Weights	16 lb. bond to 80 lb. cover / 60 – 220 gsm		
Media Types	Plain Lightweight Cardstock Cardstock Hole Punched Recycled Pre-Printed Letterhead Bond Lightweight Glossy Cardstock Glossy Cardstock Custom		
Total Capacity			
Device Standard Capacity ³	700 sheets		
Device Total Capacity ³	1,250 sheets		
Paper Output			
Output Capacity ³	250 sheets		
Automatic 2-Sided	NA Standard		
Device Specification	VersaLink C405N VersaLink C405DN		
Electrical Requirements			
North America	Voltage: 110-127 VAC+/- 10 % Frequency: 50/60 Hz+/- 3Hz, 10 A		
Europe	Voltage: 220-240 VAC+/- 10 % Frequency: 50/60 Hz+/- 3Hz, 6 A		
Power Consumption			
Continuous Printing ⁶	750 watts or less		
Ready (Standby) Mode ⁴	82 watts or less		

	403 Colour Multifuriction Fiffiter		
Power Consumption			
Energy Saver (Sleep) Mode	4 watts or less		
Operating Environment			
Required Temperature Range			
Storage	32° F to 95° F / 0° C to 35° C		
Operating	50° F to 90° F / 10° C to 32° C		
Required Reletive Humidity	10% to 85%		
Sound Power Levels	Operating: 6.88 B(A) or less; Standby 5.0 B(A) or less		
Sound Pressure Levels	Operating 52.3 dB(A) or less, Standby 28.7 dB(A) or less		
Boot Time (from Off to UI Ready)	As fast as 60 seconds		
Warm-Up Time (from Power Save)	As fast as 6 seconds		
Dimensions and Weight (unpackage	ed)		
VersaLink C405N	Width: 17 in. / 432 mm Depth: 21.3 in. / 540 mm Height: 23.6 in. / 599 mm Weight: 72 lb. / 33 kg		
550-sheet Paper Tray	Width: 16.8 in. / 427 mm Depth: 19.1 in. / 485 mm Height: 5.4 in. / 138 mm Weight: 8.6 lb. / 3.9 kg		
Dimensions and Weight (packaged)			
VersaLink C405N	Width: 23.7 in. / 602 mm Depth: 26.3 in. / 669 mm Height: 30.0 in. / 761 mm Weight: 86 lb. / 39 kg		
550-sheet Paper Tray	Width: 23.2 in. / 590 mm Depth: 21.4 in. / 544 mm Height: 9.5 in. / 241 mm Weight: 11.7 lb. / 5.3 kg		
System Certification/Regulatory Co	mpliance		
Certifications	To view the latest list of certifications, go to www.xerox.com/OfficeCertifications.		
Сору	VersaLink C405N VersaLink C405DN		
Document Scanner	50-sheet Single-Pass Duplex Automatic Document Feeder (DADF)		
Document Scanner Size	Platen: Up to 8.5 x 11.7 in. / A4 DADF: Up to 8.5 x 14 in. / 216 x 356 mm		
Simplex Speed	Up to 36 cpm (copies per minute) 8.5 x 11 in. Up to 35 cpm A4 / 210 x 297 mm		
Duplex Speed	Up to 24 cpm (copies per minute) 8.5 x 11 in. Up to 23 cpm A4 / 210 x 297 mm		
First-Copy-Out Time	As fast as 11 seconds colour / 8 seconds black and white		
Sides (input:output)	1:1, 1:2, 2:2 and 2:1		
Quantity	1 to 999		
Resolution	Up to 600 x 600 dpi		
Reduction/Enlargement	Variable zoom from 25% to 400% in 1% increments		
Concurrency	Concurrent scanning and printing		

ACTOR VETSGETTIK C	103 Cotodi Materialica III iliter
Сору	VersaLink C405N VersaLink C405DN
Copy Features	Automatic Background Suppression Book Copying with Center Erase
	Collation
	Darkness Control
	Edge Erase ID Card Copy
	N-up
	Reduce / Enlarge 25 % to 400 % Image Shift
	Original Type
	Sample Copy Sharpness
Print	VersaLink C405N VersaLink C405DN
First-Page-Out Time	As fast as 13 seconds Colour / 12 seconds Black and White
Resolution	Up to 600 x 600 x 8 dpi (enhanced)
Page Description Languages	PCL® 5e, 6
	PDF
	XPS TIFF
	JPEG
	HP-GL Adobe® PostScript® 3™
Maximum Print Area	4 mm from edge of paper
Print Features	Application Defaults
	Bi-directional Real-time Status
	Booklet Creation Draft Mode
	Job Identification
	Job Monitoring Personal Print
	Print from USB
	Sample Set Saved Job
	Scaling
	Secure Print Skip Blank Pages
	Store and Recall Driver Settings
	Two-sided Printing (as default - DN only) Xerox® Earth Smart Driver Settings
Print from USB	Allows walk-up printing from Type A USB port
	Supports direct printing from computer via Type B USB port
	Supported file formats: PDF, JPEG, TIFF, XPS, PDF/A
Operating Systems	Windows®, 7, 8, 10, Server 2000, Server 2003, Server 2008, Server 2008 R2 Server 2012 Mac OS® version 10.10, 10.11 & 10.12
	Citrix
	Redhat® Enterprise Linux®
	IBM® AIX® 7.2
	HP-UX® 11iv3 Oracle® Solaris 11.3
	Fedora Core 24
	SUSE® 13.2
Network Protocols	TCP/IP: HTTP/HTTPS, Internet Printing Protocol, LPR/LPD, Raw Socket Printing/Port 9100, IPv4/IPv6,WSD LDAP
	Bonjour® / AirPrint™
	FTP Most protocols not in use can be disabled
Administrative Protocols	DHCP, SNMP, WINS, HTTP, HTTPS, TLS, SNTP, MDNS
Font Capability	PostScript fonts: 144
	PCL fonts: 82
Mobile Solutions and Mobile Device	
Xerox® Mobile Express Driver®	Makes it easy for mobile users to find, use and manage Xerox® and non-Xerox® devices in every new location. Plug into a new network, and Mobile Express Driver automatically discovers available printers and provides status and capability information. Save a list of "favorite" printers for each
	location, store application print settings for use on any printer in any network, and greatly reduce mobile support calls to IT.
Xerox® Global Print Driver®	A truly universal print driver that lets IT administrators install, upgrade and manage Xerox® and non-Xerox® devices from a single driver. It provides a
	consistent, easy-to-use interface for end-users, reducing the number of support calls, and simplifying print services management.

Mobile Solutions and Mobile Device Apps			
Apple® AirPrint®	Print email, photos and important office documents directly from an Apple iPhone® or iPad® with no drivers to install and no cables to connect. With AirPrint, an iPhone or iPad automatically locates and connects to the AirPrint-enabled device over the office Wi-Fi network.		
Google Cloud Print™	Google Cloud Print connects print devices to the web, enabling users to print the applications they use every day from smartphones, tablets, Chromebook™ notebook computers and any other web-connected device.		
Xerox® Print Service Plug-in for Android™ (Free at Google Play™ Store)	The Xerox® Print Service Plug-in for Android KitKat (4.4 or greater) devices streamlines mobile printing without third-party apps or additional print drivers. You can easily print photos, Web pages and documents when your mobile device is connected to multifunction printers using a wireless network. A robust print option set includes two-sided printing, stapling and secure code release. A free download is available from the Google Play™ store.		
Xerox® Mobile Link App (Free at Google Play™ Store and Apple® App Store)	The Xerox® Mobile Link App allows you to scan, email and fax from your phone or tablet by connecting with our multifunction printers and send data to and print data from cloud storage. It is easy to create Mobile Link One-Touch Workflows between a mobile device and a multifunction printer. Using a manual address or QR code identification for pairing, automatic device discovery makes it easy to find and pair a mobile device with a nearby Xerox® multifunction printer.		
Xerox® Print Management and Mobility Suite, Xerox® Print Management and Mobility Service	Xerox® Print Management and Mobility Suite is a modular set of workflows designed to save customers time and money by providing effective control over their print fleet, while enabling worker productivity and mobility through a set of robust workflows. Xerox enables ultimate customer flexibility by offering these capabilities in both an on-premises server version and with a cloud based-version of this solution.		
Scan	VersaLink C405N VersaLink C405DN		
Capability	Black and White and Colour Scanning		
Concurrency	Scan while the system is printing copy or network print jobs, or while it is transferring scan to network or fax jobs		
Simplex Input Speed	Black and White: Scan up to 40 ipm – 8.5 x 11 in. / 38 ipm A4 / 210 x 297 mm Colour: Scan up to 21 ipm – 8.5 x 11 in. / 20 ipm A4 / 210 x 297 mm		
Duplex Input Speed	Black and White: Scan up to 52 ipm – 8.5 x 11 in. / 50 ipm A4 / 210 x 297 mm Colour: Scan up to 27 ipm – 8.5 x 11 in. / 26 ipm A4 / 210 x 297 mm		
Resolution	Optical – 600 x 600 dpi		
Bit Depth	24-bit Colour / 8-bit Greyscale		
Maximum Scan Area	Platen: Up to 8.5 x 11.7 in. / A4 / 210 x 297 mm Document Feeder: Up to 8.5 x 14 in. / 216 x 356 mm		
Network Filing Protocol	FTP SMTP SMB/SMB2/SMB3		
File Formats	JPG TIFF (single and multi-page) XPS (single and multi-page) PDF (single and multi-page) Searchable PDF Password-protected PDF Linearised PDF (set via embedded web server) and PDF/A		
Scan Driver Compatibility (Network Only)	WIA TWAIN		
Supported Scan Destinations	Scan to Home Scan to USB Scan to Email Scan to Network (FTP or Browse SMB)		
Software Solutions			
Xerox® ConnectKey® Apps (Found at the Xerox® App Gallery	Increase user productivity by simplifying and shortening everyday tasks. Unlike traditional software, ConnectKey Apps do not require a dedicated server, PC or IT resource. Instead, simply download these lightweight, serverless ConnectKey Apps to the device.		

Country	Vended COEN	
Security	VersaLink C405N VersaLink C405DN	
Security Features	256-bit Encryption Access Controls Audit Log Automatic Self-Signed Certificate Creation Certificate Path Validation Certificate Revocation Settings Domain Filtering FIPS 140-2 Firmware Verification Immediate Disc Overwrite (with optional HDD) IP Address Filtering Network Authentication Port Filtering Role Based Permissions Secure Email Secure Fax Secure Print Secure Scan Security Certificates Smart Card Enablement (CAC/PIV/.NET) SNMPv3 TLS	
Fax ⁵	VersaLink C405N VersaLink C405DN	
Fax Speed	33.6 Kbps	
Memory	4 MB	
Resolution	Up to 600 x 600 dpi resolution	
Compression	MH, MR, MMR, JBIG	
Fax Features	Walk-up Fax, LAN Fax, Direct Fax, Fax Forward to Email Fax dialing via Unified Address Book (up to 2,000 contacts)	
Device Management		
Xerox® CentreWare® Web		
	A Web-based server application for network administrators that permits web browser-based device management from any workstation, whether running Windows or UNIX or any other operating system Works with any SNMP-managed printer from any manufacturer Provides help with device discovery and installations, health checks and troubleshooting, and device upgrades, as well as basic accounting and asset management.	
Xerox® Embedded Web Server - Inte	egrated Device Web Page	
Device Status	Tray status/contents Consumables status Billing/Usage Quick Links	
Job Submission	Print-ready files (PS, PCL, PDF, XPS, JPEG)	
Device Administration	Allows simple, remote installation setting of configuration options and management of the device	
Browsers	Microsoft® Internet Explorer® 11 Microsoft Edge™ 38 Mozilla™ Firefox® 48 Apple® Safari® 9.1 Google Chrome™ 52	
Remote Print Services		
Xerox® MeterAssistant® Service	Automates the process of collecting and submitting meter reads for tracking and billing of Xerox® device usage. Eliminates the need for time-consumingend-user involvement and ensures that meter reads are submitted to Xerox on time.	
Xerox® SuppliesAssistant® Service	Automatically orders supplies for Xerox output devices based on actual usage, eliminating the need to manually manage supplies inventory.	
Maintenance Assistant	Offers a fast (and free) way to resolve potential issues and receive assistance and automate the troubleshooting/repair process. Diagnostic data is sent to Xerox®, allowing for problems to be solved faster with increased uptime.	
Accounting		
Xerox® Standard Accounting (Stand	lard)	
Tracking	Copy, Print, Fax, Scan and Email usage	
Accounting	Up to 9999 User Accounts with HHD installed Up to 1000 User Accounts without HHD installed (User ID) Up to 500 General accounts (Client)	

Accounting

Xerox® Standard Accounting (Standard)

Features

- Administrator can manage the feature via the Web User Interface or device control panel in tools.
- Administrator has the ability to import or export user accounts, Group Accounts, General Accounts and User limits via an industry standard CSV file.

Accounting Options – Network Accounting (Allows central server to manage all accounting)

- Enhanced network accounting with up to the minute data on how the system is being used
- Comprehensive management and enterprise scale tracking and reporting of device usage of copy, print, scan and server fax
- Numerous solutions are available through Xerox Alliance Partners. For details visit www.xerox.com
- Security enhancements with the addition of HTTPS protocol support
- Device requests account authentication from third party server enabling larger databases of users and accounts
- Accept Authentication Login at control panel and pass to third party Networking Account
- Interface with third party accounting terminal for accounting user interface

What's In The Box

VersaLink C405 Color Multifunction Printer

Starter Capacity Print Cartridge: One of each (Cyan, Magenta, Yellow: 2,000 print capacity⁶, Black: 3,000 print capacity⁶ Software and Documentation CD (Safety, Regulatory, Recycling and Disposal Guides, Print Drivers, and Warranty Statement) Installation Guide

Quick Use Guides Power cord Fax cord

Supplies and Accessories	Quantity	Part Number		
Supplies				
Standard Capacity Toner Cartridges	Cyan: 2,500 standard pages ⁶ Magenta: 2,500 standard pages ⁶ Yellow: 2,500 standard pages ⁶ Black: 2,500 standard pages ⁶	106R03510 106R03511 106R03509 106R03508		
High Capacity Toner Cartridges	Cyan: 4,800 standard pages ⁶ Magenta: 4,800 standard pages ⁶ Yellow: 4,800 standard pages ⁶ Black: 5,000 standard pages ⁶	106R03522 106R03523 106R03521 106R03520		
Extra-High Capacity Toner Cartridges	Cyan: 8,000 standard pages ⁶ Magenta: 8,000 standard pages ⁶ Yellow: 8,000 standard pages ⁶ Black: 10,500 standard pages ⁶	106R03534 106R03535 106R03533 106R03532		
Imaging Unit (includes 4 imaging units)	Cyan: 60,000 standard pages ⁷ Magenta: 60,000 standard pages ⁷ Yellow: 60,000 standard pages ⁷ Black: 60,000 standard pages ⁷	108R01121		
Waste Cartridge	30,000 standard pages ⁷	108R01124		
Accessories				
550-sheet Paper Tray		097S04400		
Productivity Kit with 320 GB HDD		097S04914		
Stand		497K13660		
Wireless Network Adapter		497K16750		

¹ Maximum volume capacity expected in any one month. Not expected to be sustained on a regular basis.

² Expected regular monthly throughput.


³ Paper capacities are based on 20 lb. / 75 gsm stock; capacities will vary with different weight stocks.

 $^{{\}rm ``Power \, states \, defined \, per \, ENERGY \, STAR'' \, Programme \, requirements \, for \, Imaging \, Equipment.}$

⁵ Requires analogue phone line.

Average standard pages. Declared Yield in accordance with ISO/IEC19752. Yield will vary based on image, area coverage and print mode.

⁷ Approximate pages. Ďeclared Yield based on 3 letter-/A4-size 20 lb. (75 gsm) pages. Yield will vary based on media type, size, weight, orientation, and usage patterns.

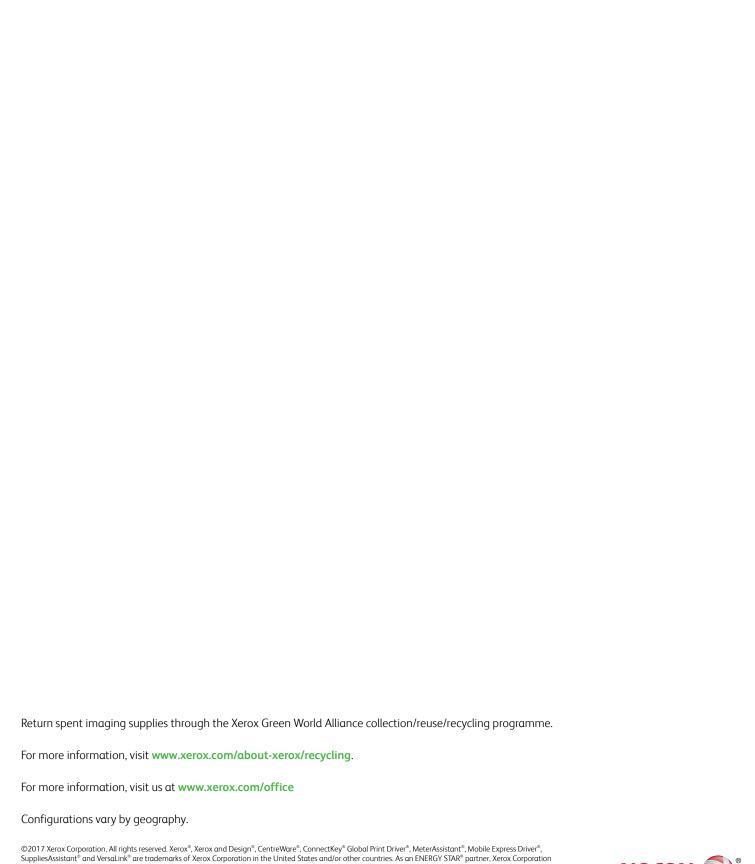

has determined that this product meets the ENERGY STAR guidelines for energy efficiency (DN and DNI configurations). ENERGY STAR and the ENERGY STAR mark are

registered U.S. marks. The information in this brochure is subject to change without notice.

3/17 BR20954 - VC4SS-022B

